




Specification

Model	FRL		
Port size	1/4	3/8	1/2
Medium	Air		
Operating pressure range	0 ~ 15 Bar.		
Proof pressure	20 Bar.		
Ambient temperature	(-5) ~ + 60 °C (No freezing)		
Lubricating oil capacity	200 cc		
Max. Flow rate (l/min)	1200	2000	2100
Min. Flow for oil drip	30 l/min	65 l/min	80 l/min
Recommended lubricating oil	Turbine oil ISO-VG32		
Weight	545 g.		

Symbol:

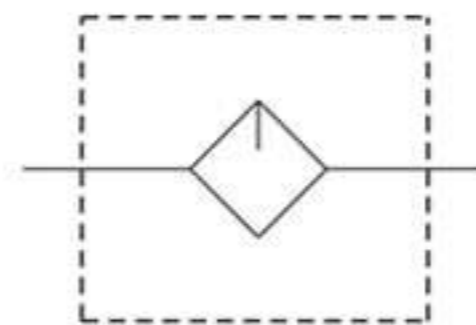

Order example:

FRL - XL05

MODEL

XL05: 1/4"

XL06: 3/8"

XL07: 1/2"

XL08: 3/4"

XL09: 1"

